

Datablad

Art. Nr. **495367**

Benämning **BEST 2-MAN**




Rostfria dränkbara läns-pumpar av högsta kvalitet för pumpning av lätt förorenat vatten/ gråvatten. Pumphus, motorhölje, pumphjul, diffusor och bottensil av rostfritt stål AISI 304 (SIS 2333).

Axel av rostfritt stål, oljesmord dubbel mekanisk axeltätning. Motor sidan kol/keramik/NBR och Pumphjulsidan sic/sic/NBR. Max (Mjuk)partikelstorlek i vattnet 10 mm. Max vattentemperatur 35°C Anslutningskabel 10m. Max nedsänkingsdjup 7 meter.


Search Parameters

Liquid	Water
Temperature	20°C
Date	2023-06-08 16:25:16

Performance Curves

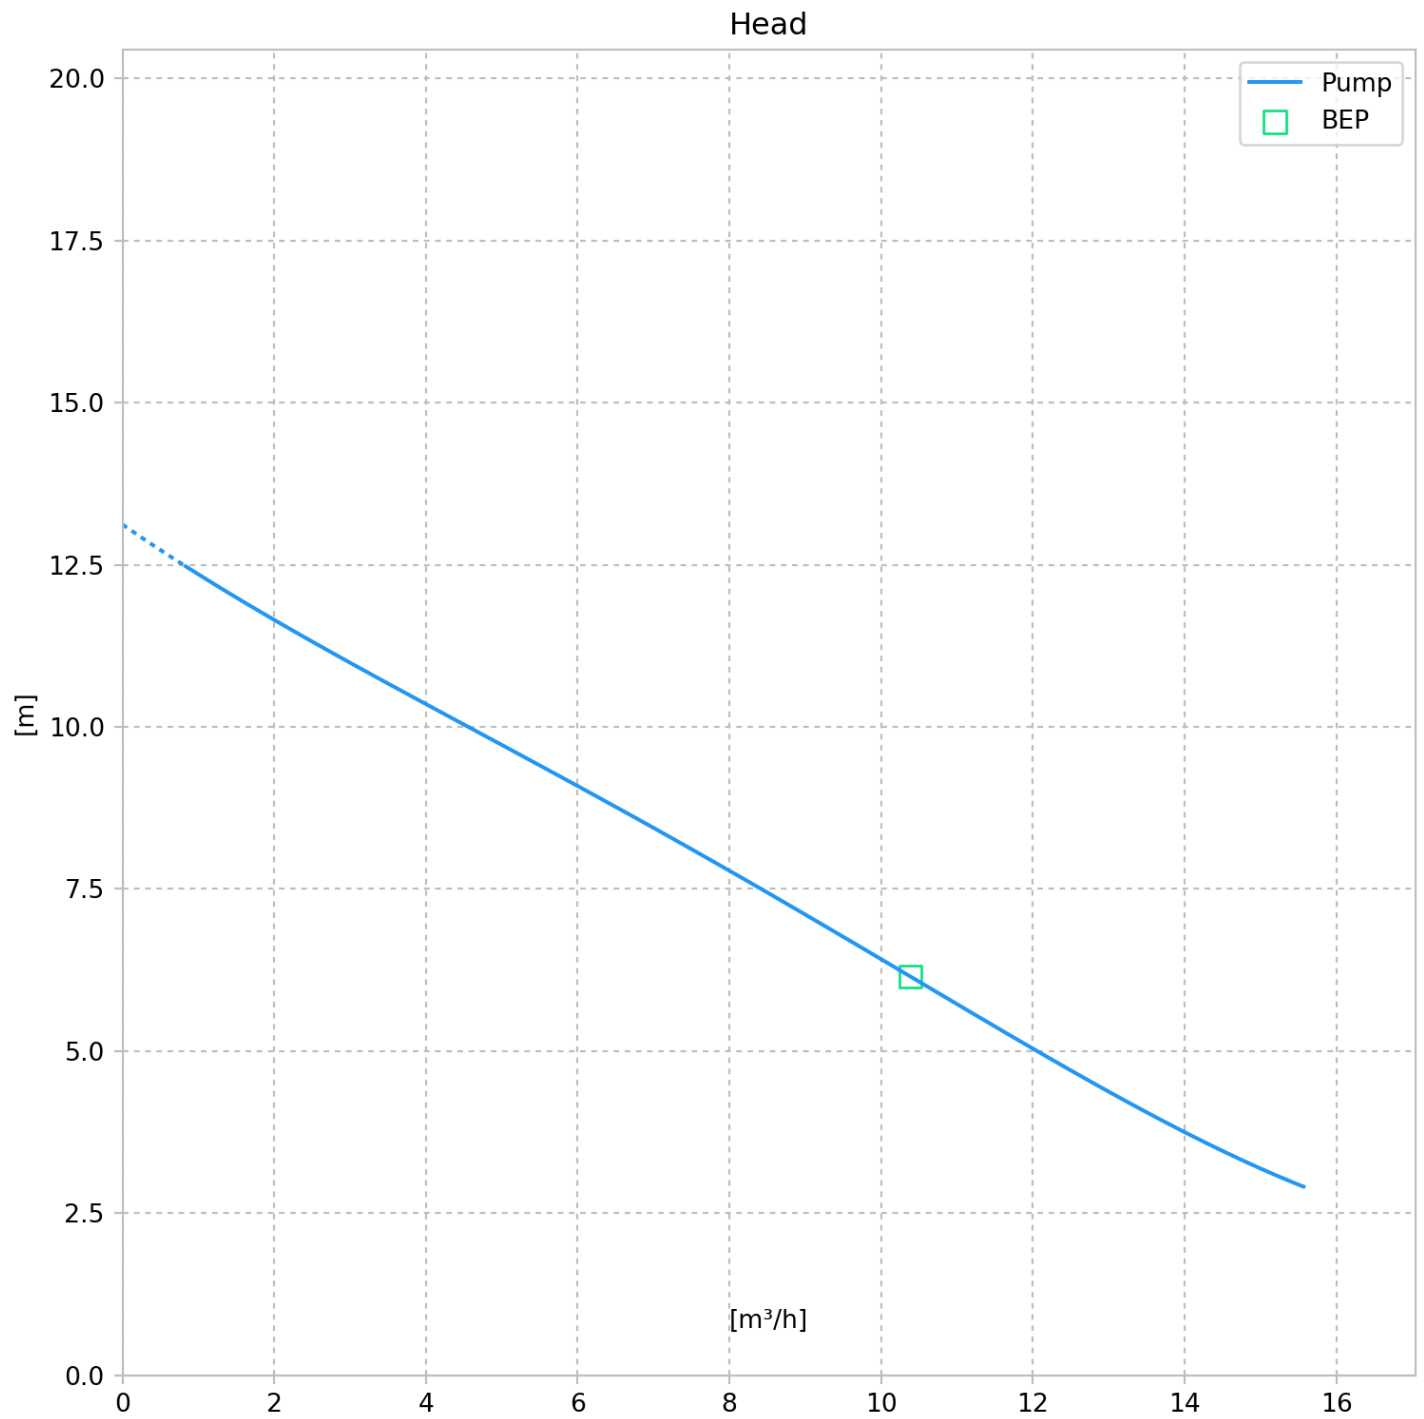

Drawings

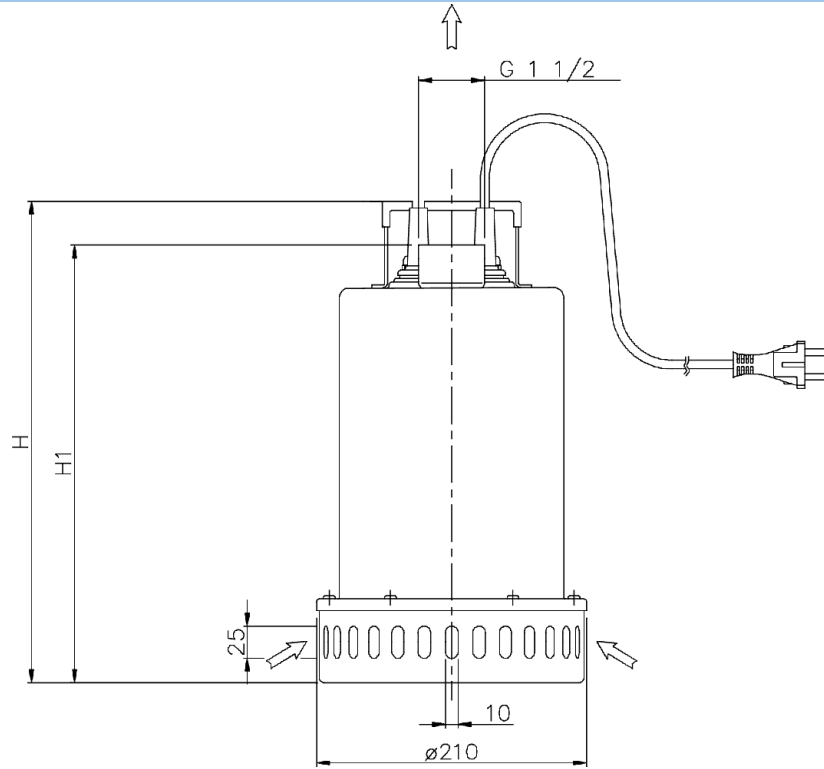

Dimensions [mm]

H	352
H1	315
Weight P&M;	12 kg

Technical Specifications

Materials

Casing	AISI 304
Impeller	AISI 304
Shaft	AISI 303 (wet extension)

Motor

1-phase / 3-phase	3~
Code starting mode	Unbek
Currents	2 A
Degree of protection	IP 68
Efficiencies	-
Efficiency	- %
Frequency	50 Hz
Full name	400V
Insulation class	F
Item name	BEST2_400_Three Phase
Item price coding	PRICE
Make	EPE Standard
Motor design	Submersible dry type
Motor power at operating speed	- kW
Name	BEST2_400_Three Phase
No. starts per hour	40
Nominal speed	2800 1/min
Number of poles	2
Pole pairs	1
Power correction DIN VDE 0530	0.55 kW
Rated current	2 A
Rated power	0.55 kW
Rated torque	1.8758 Nm
Rated voltage	400 V
Sel. degree of protection	IP 68
Sel. voltage name	400V
Service factor	1
Speed	2800 1/min
Stages	1
Starting mode	Unknown
Temperature coefficient	No data
Title of the main position	BEST2_400_Three Phase
Voltages	400 V